

High-precision
profile bending machines
for the most challenging
applications

Innovative bending technology for more than 25 years

At the Swiss company PBT AG, we develop and produce profile bending machines and digital control systems that satisfy the highest requirements in quality and technical performance. Through the use of intelligent processes, our technologies have been setting industry standards since 1991, and are used in practically all segments of the metalworking industry: automotive, aerospace, window and building façade engineering, conveyor technology, and much more.

Our claim

Individual requirements in production technology call for specific solutions. In close cooperation with our customers, we design technical solutions for efficient manufacturing of even the most complex bending tasks. From the planning to commissioning, our experts provide support in all project phases: This includes planning, development, prototyping, series production, training of machine operators, and on-site installation. We provide advice and support during every application phase.

Global presence

Development, distribution and service for production facilities around the globe. We deliver our services and products from the two main locations of PBT AG – Weinfelden in Switzerland and Siegen in Germany (INDUMASCH GmbH). Selected service partners in many European, American and Asian countries supplement our requirement for the highest service quality.

Made in Switzerland.



Industry solutions

Custom-fit solutions for efficient production of curved profiles.
Various industries and sectors that require the highest production quality components put their trust in the precision of PBT profile bending machines.
See an overview of application examples here.



Automotive engineering
Attractively shaped and safe




Utility vehicle engineering
Stable and dependable




Window and façade engineering
Creative and stylish



Conveyor technology
Efficient and economical



Steel and metal engineering
High-precision and aesthetic




Aerospace
Lightweight and reliable




Automotive engineering
Lightweight and durable



Conveyor technology
Exact and high-performance

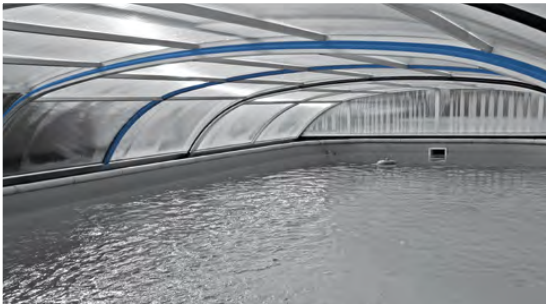

Roofing
High-quality and resilient



Contract manufacturer
Individual and trustworthy





Our profile bending machines

- Are flexible, high-precision, economical, fast and efficient
- Stand out for their high performance and versatility
- Allow fast programming without the need for programming skills, increase productivity and flexibility, and are intuitive to operate
- Permit uncomplicated tool changes
- Allow the use of special tools for steel, stainless steel and aluminium profiles
- Offer numerous additional equipment and expansions
- Can be produced as individual custom machines where required



R 1950



Our control systems

Manual

The manual version has a Siemens panel, which serves as the basis for the retrofit-compatible tablet versions TEACH-IN and TABLET350. This panel shows the operator the current X-axis position of the feed roller, with a position detection precision of 0.01 mm. The speeds of the feed roller and the rolling speed can be modified by the operator as required, from crawling speed to rapid traverse. As an additional function, the Siemens panel allows a variable front stop to be set on the X-axis. This simplifies the implementation of a recurring bending radius in series production. All axes are operated using touch controls.

TABLET Teach-in

The TABLET Teach-in control system allows small and large series to be manufactured automatically. The programming takes place in teach-in mode, i.e. the operator teaches the machine a single time using touch controls, and then the program can be repeated as often as desired. The program directory allows existing data to be accessed and changed. This TABLET Teach-in control system shows the operator the current X-axis position of the feed roller with a position detection precision of 0.01 mm, as well as the Y-axis position for the corresponding component length. The speeds of the feed roller and the rolling speed can be modified by the operator as required, from crawling speed to rapid traverse.

Tablet350

The PC-based control system for 3-roller bending machines was developed by PBT, and in 1995 it was the first to offer the capability of controlling bending tasks using software.

The TABLET350 was derived from the uncompromising PC400 control system, and offers its main functions in an elegant format: bending programs can be created, managed and controlled using the tablet, without the need for programming skills. Illustrated control elements facilitate intuitive operation during everyday work, while the graphic display of the programmed workpiece with bending radii and bending lengths allows visual inspection of the programmed data. The communication with the bending machine takes place via WiFi. Data backups take place using a convenient USB port located on the outside of the control unit.

The tablet can be mounted on the machine using the supporting arm supplied, and can be adjusted for optimal operation. If greater freedom of movement is required, the wireless data transmission makes it possible to move around freely in the room with the TABLET350.

PC400

A detailed description of the full version of the control system variant PC400 can be found on the following pages.

PC400

Convenient creation and saving of bending programs

The PC-based control system for 3-roller bending machines was developed by PBT, and in 1995 it was the first to offer the capability of controlling bending tasks using software. The PC400 is currently the most advanced and flexible control system on the market, and offers countless advantages for small and large series production processes.

Whether integrated into a network or as an individual work station, as a 3D version or with the addition of a mandrel, the new PC400 control system can be individually configured.

On the basis of a high-performance Windows PC with a state-of-the-art multi-touch display, bending programs can be created, managed and controlled intuitively on the moveable control terminal, without the need for programming skills. Here the graphic display of the programmed workpiece allows visual inspection of the programmed data. The hardware is network-compatible and can easily be integrated into the existing IT infrastructure.

Flexible, efficient and economical

The control programs generated allow up to 25 different segments to be arranged in any sequence and bent in one or more passes. Subprograms for the creation of ellipses, handrails for spiral staircases, "Napoleon curves", S-curves or special shapes are already available as standard.

By means of precise control of the X and Y-axis, perfect transitions are achieved between radii and straight sections. Non-conformances caused by the machine are excluded through the continuous regulation of the axis position during bending, from individual parts to large-scale series production. Unavoidable non-conformances in programmed data, which can result e.g. from different material elasticities, are corrected in the software by entering actual manufactured values – consistent repeat precision and low reject rates are thus ensured.

Open and expandable

With the PC400 control system, an open system has been created, such that the control system can be individually expanded through the use of standard components.

The PC400 can be expanded at any time through the use of options such as the automatic radius measuring system, Z-axes for bending into the third dimension, or the integration of a mandrel bending unit with a feed system.

The control panel communicates with a Siemens S7-1200. This allows the programming of other digitally controlled processes in the manufacturing sequence.



Benefits

- Performance of the bending process in one or more passes - even where there are different radii within a component
- Material catalogue / springback diagrams can be created for all profiles - up to and including automatic radius measurement
- All software tools / subprograms included
- Assignment and access of PDF documentation (image/text) for creation of workpieces using a corresponding program
- Optional interface with CAD software for the creation of programs based on design data
- Workplace-independent creation, management and data backup of programs by means of network integration
- Direct support from PBT experts thanks to the remote maintenance capability



Mandrel bending device

MBD4 CNC-controlled

- Profile feed unit 6 m version
- Compressive force approx. 4000 kg
- For bending hollow profiles up to approx. 2.5 x profile width in one pass.
- Servo technology with CNC-controlled mandrel and feed unit (booster).
- Guarantees slip-free bending even of small radii in one pass.



Automatic radius measurement system

- Fully automatic radius measurement based on our PC400 control systems
- The pneumatic gauge heads can be positioned variably to the right and left of the bending rollers
- Measurement of one or more different radii in the same profile is possible
- Continuous and cyclical measurement of the actual manufactured radius possible
- After measurement of the actual manufactured radius, automatic correction takes place until nominal radius is reached



Supporting roller controlled

(Z-axis) for 3D bending
(right and/or left)

The controlled supporting roller additionally makes it possible to bend with a gradient. With the associated software, it is simple to programme and bend 3D elements.



3D bending/turning device

manual or CNC-controlled
for model PBT25

Allows bending into the third dimension and additional turning of the profiles in two directions.

References

International companies in a wide range of industries benefit from the cost-effectiveness, precision and reliability of our machinery and services.

Here are a selection of our customers:

Agrikon, Airbus, Albixon, Alcan, Asas, Audi, Barnshaws, Bestbend, Biegetechnik Steinrücken, BMS, Brökelmann Aluminium, Bürstner, CWA Constructions, Die Bahn, esa, Fendt, Fritzmeier, HMT, Holden, Hydro, Hyundai, Jaguar, Jansen, Kersten Europe, Linde, Lugstein, LS Lederer, Mercedes-Benz, Metallgestaltung Eickhoff, Obru, Pemat, Porsche, Proas, Rexroth, Rimowa, Ronal Group, Sadeif, SAPA, Schaeffler Group, Schüco, Siemens, Sjolund A/S, Still, Thyssen Krupp, Voest Alpine, Volkswagen, Walter Mauser, Welser Profile, XAL



R 6 2 7 8



Product example 1
Automotive engineering / wind deflector




Product example 2
Conveyor technology / transport systems



Product example 3
Utility vehicle engineering / cab profiles



Product example 4
Conveyor technology / cladding sheet



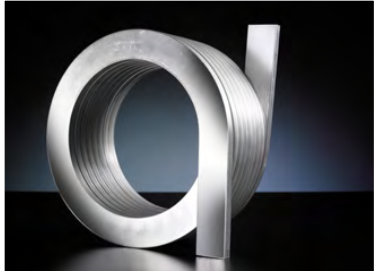


Product example 5
Cooling spiral



Product example 6
Exhibition stand construction













































Our profile bending machines

	
X-axis = responsible for the bending radius	
Pressing power	12 t
Positioning accuracy - servo-controlled	0.01 mm
Drive system	Hydraulic
Stroke (controlled)	200 mm
Hydraulic oil volume	7 litres
	
Y-axis = responsible for the segment lengths (feed)	
All 3 rollers individually! driven	YES
Continuously adjustable roller speed	1 – 30 rpm with PC400
Maximum torque per roller	500 Nm
Drive system of rollers	Electric motors
Roller height	110 mm (optional 220 mm)
Tool holder diameter	40 mm
	
Z-axis = for equalising or bending into the 3rd dimension	
Manual standard version	Series
Crank-operated version with position detection capability to 0.1 mm	Optional
PC-controlled version, positioning accuracy 0.01 mm	Optional
Special	
Manual or PC-controlled activation possible	Manual / TEACH-IN / TABLET350 / PC400
Continuously adjustable front roller distance, allowing tiny bending radii	256 (optional 80) – 518 mm
Bending direction	away from operator
Start/stop automatic when using hydraulics with PC400	switches hydraulics off after 15 minutes of non-use
Positioning of the machine	Lift truck
Roller supports	optional
General technical data	
Connection	400 V, 16 A
Length / width / height	905 mm / 950 mm / 1,125 mm

ARKUS12®
up to profile diameter approx. 60 mm or profile height 150 mm

PBT25® up to profile diameter approx. 114 mm or profile height 300 mm		PBT35 Servo Wide® up to profile diameter approx. 180 mm or profile height 300 mm		HELIX Servo® up to profile diameter approx. 219 mm or profile height 350 mm	
27 t		35 t		65 t	
0.01 mm		0.01 mm		0.01 mm	
Hydraulic		SERVO DRIVE		SERVO DRIVE	
265 mm		390 mm		445 mm	
18 litres		9 litres		9 litres	
					
YES		YES		YES	
1 – 22 rpm with PC400		1 – 16 rpm		1 – 8 rpm	
1600 Nm		3000 Nm speed independent		9000 Nm speed independent	
Electric motors		SERVO DRIVE		SERVO DRIVE	
300 mm		400 mm		500 mm	
105 mm (on X-axis, solid material produced from a single piece)		105 mm (solid material produced from a single piece)		130 mm (solid material produced from a single piece)	
Series		-		-	
Optional		Series		-	
Optional		Optional		Series	
Manual / TEACH-IN / TABLET350 / PC400		PC400		PC400	
200 – 1000 mm		360 – 1120/1400 mm		630 – 1330 mm	
away from operator		away from operator		away from operator	
switches hydraulics off after 15 minutes of non-use		no significant power consumption during non-use		no significant power consumption during non-use	
Lift truck		Crane / forklift		Crane	
Series		Series		Series	
400 V, 16 A		400 V, 32 A		400 V, 63 A	
1,680 mm / 1,250 mm / 1,390 mm		1,970 mm / 1,860 mm / 1,420 mm		2520 mm / 2240 mm / 1760 mm	

Production examples

ARKUS12®												
	mm	70/12	100/10	30/30	30	50/50/5	50/50/5	60/60/7	60/60/7	60/60/7	UNP 80	UNP 80
	R min.	300	150	150	150	300	400	400	400	400	400	400
PBT25®												
	mm	120/15	300/15	60/60	60	80/80/8	80/80/8	80/80/8	80/80/8	80/80/8	UNP 180	UNP 180
	R min.	1.000	300	500	500	600	1.500	500	500	500	600	600
PBT35 Servo Wide®												
	mm	120/15	260/20	80/80	80	100/100/10	100/100/10	100/100/10	100/100/10	100/100/10	UNP 200	UNP 200
	R min.	600	350	700	700	800	1.000	600	900	750	600	600
HELIX Servo®												
	mm	200/30	260/30	100/100	80	120/120/12	120/120/12	130/130/14	130/130/14	130/130/14	UNP 260	UNP 260
	R min.	2.000	450	1.000	500	1.000	1.500	750	1.000	750	1.000	1.000

-	1-PE 80	2" [60]	50/50/3	60/30/4	-	-	-	Aluminium	Aluminium	-	Aluminium
-	500	300	300	500	-	-	-	200	200	-	200
IPE 120	IPE 160	4" [114]	160/60/4	160/60/4	Stahl	Stahl	Stahl	Aluminium	Aluminium	Aluminium	Aluminium
800	500	600	1.000	1.500	300	300	300	200	200	400	200
IPE 160	IPE 180	Ø 180	100/100/10	160/60/4	Stahl	Stahl	Stahl	Aluminium	Aluminium	Aluminium	Aluminium
1.500	500	1.000	600	1.000	300	300	300	200	200	400	200
HEA 200	HEB 180	Ø 219	250/150/10	180/80/6	-	-	-	-	-	-	-
3.000	2.000	2.000	1.750	1.750	-	-	-	-	-	-	-



PBT AG
Profile Bending Technology

Dufourstrasse 71
CH-8570 Weinfelden
Switzerland

++41 71 633 21 51
info@pbt.ch
www.pbt.ch